



**US Army Corps
of Engineers**

Hydrologic Engineering Center

A Software System to Aid in Making Real-Time Water Control Decisions

September 1983

REPORT DOCUMENTATION PAGE

Form Approved OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to the Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ORGANIZATION.

1. REPORT DATE (DD-MM-YYYY) September 1983		2. REPORT TYPE Technical Paper		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE A Software System to Aid in Making Real-Time Water Control Decisions			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) Arthur F. Pabst, John C. Peters			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army Corps of Engineers Institute for Water Resources Hydrologic Engineering Center (HEC) 609 Second Street Davis, CA 95616-4687				8. PERFORMING ORGANIZATION REPORT NUMBER TP-89	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/ MONITOR'S ACRONYM(S)	
				11. SPONSOR/ MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES Presented at the World Meteorological Organization (WMO) sponsored Technical Conference on Mitigation of Natural Hazards through Real-Time Data Collection and Hydrological Forecasting, held at Sacramento, California on 19-23 September 1983.					
14. ABSTRACT The Corps of Engineers has responsibility for operating numerous water resource systems through the United States. A primary purpose of many of these systems is flood control; however, most systems are multipurpose with additional project purposes such as hydropower generation, water supply, navigation, water quality enhancement and recreation. Effective operation of a water resource system typically requires (1) timely acquisition of reliable data that reflects the current state of the watershed and water resource system, (2) data analysis and runoff simulation to produce forecasts of runoff, perhaps with and without estimates of the effects of future precipitation, and (3) system analysis to produce optimal operations decisions. A major advanced in automated data collection has occurred in recent years with the use of geostationary satellite for data transmission. A Data Collection Platform (DCP) at a gage (e.g., precipitation or stage gage) contains a microprocessor for storing the data and transmitting it via geostationary satellite to a receiver (downlink) where the data is placed in a computer file. Use of this means of acquiring data is increasing rapidly in the Corps of Engineers and is a primary source of real-time data for a number of water resource systems. During the last several years the Hydrologic Engineering Center (HEC) has been involved in developing and adapting software for real-time data analysis, short-term runoff forecasting and reservoir system simulation. These software components are part of a comprehensive software system that also includes a specially-designed data storage system, an interactive control interface, and a graphical display capability that facilitates interpretation and analysis of observed data and simulation results					
15. SUBJECT TERMS water control, flood forecasting					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 24	19a. NAME OF RESPONSIBLE PERSON
a. REPORT U	b. ABSTRACT U	c. THIS PAGE U			19b. TELEPHONE NUMBER

A Software System to Aid in Making Real-Time Water Control Decisions

September 1983

US Army Corps of Engineers
Institute for Water Resources
Hydrologic Engineering Center
609 Second Street
Davis, CA 95616

(530) 756-1104
(530) 756-8250 FAX
www.hec.usace.army.mil

TP-89

Papers in this series have resulted from technical activities of the Hydrologic Engineering Center. Versions of some of these have been published in technical journals or in conference proceedings. The purpose of this series is to make the information available for use in the Center's training program and for distribution with the Corps of Engineers.

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.

A Software System to Aid in
Making Real-Time Water Control Decisions

By

Arthur F. Pabst^{1/} and John C. Peters^{2/}

INTRODUCTION

The Corps of Engineers has responsibility for operating numerous water resource systems throughout the United States. A primary purpose of many of these systems is flood control; however most systems are multipurpose with additional project purposes such as hydropower generation, water supply, navigation, water quality enhancement and recreation. Effective operation of a water resource system typically requires (1) timely acquisition of reliable data that reflects the current state of the watershed and water resource system, (2) data analysis and runoff simulation to produce forecasts of runoff, perhaps with and without estimates of the effects of future precipitation, and (3) system analysis to produce optimal operations decisions.

A major advance in automated data collection has occurred in recent years with the use of geostationary satellites for data transmission. A Data Collection Platform (DCP) at a gage (e.g. precipitation or stage gage) contains a microprocessor for storing the data and transmitting it via geostationary satellite to a receiver (downlink) where the data is placed in a computer file. Use of this means of acquiring data is increasing rapidly in the Corps of Engineers and is a primary source of real-time data for a number of water resource systems.

During the last several years the Hydrologic Engineering Center (HEC) has been involved in developing and adapting software for real-time data analysis, short-term runoff forecasting and reservoir system simulation. These software components are part of a comprehensive software system that also includes a specially-designed data storage system, an interactive control interface and a graphical display capability that facilitates interpretation and analysis of observed data and simulation results. The software system, in whole or in part, is intended for use throughout the Corps of Engineers on computers that are dedicated to water control activities. The software is presently being implemented on Harris 100/500 minicomputers.

This paper focuses on the conceptual basis for, and capabilities of, the software system. Illustration of software capabilities is based on application to the 16,900 sq. km. Scioto Basin in Ohio, USA.

1. Chief, Special Assistance Branch, Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, California, USA
2. Hydraulic Engineer, Hydrologic Engineering Center, U. S. Army Corps of Engineers, Davis, California, USA

For presentation at the WMO-sponsored Technical Conference on Mitigation of Natural Hazards through Real-Time Data Collection and Hydrological Forecasting, held at Sacramento, Calif. on September 19-23, 1983.

APPROACH

Assuming that raw "real-time" data is available in a computer file, the following tasks are performed:

1. Raw data is decoded to a form with desired engineering units. Data conversions such as stage to discharge and accumulated to incremental precipitation are made. Simple range checks on data validity are performed. Data is interpolated for isolated periods of missing data.
2. The availability of data is assessed. A Data Status Table is generated in which the presence or absence of verified data is indicated for each hydrometeorological station.
3. Based on data availability, a time of forecast is adopted. Choice of forecast time generally involves a tradeoff between data availability and the lag between the current time and the forecast time.
4. Point precipitation data is used to develop hyetographs of subbasin-average precipitation for each subbasin.
5. Automatic estimation of runoff parameters (unit hydrograph, loss rate and base flow) for headwater subbasins is performed.
6. Based on results of parameter estimation, loss rate and base flow parameters are adopted for remaining subbasins.
7. Runoff hydrographs are calculated, routing and combining is performed and calculated hydrographs are blended with observed hydrographs wherever observed data is available. The end product of this step is a set of reservoir inflow hydrographs and hydrographs at downstream control points.
8. Runoff hydrographs from step 7 are used with a reservoir system simulation model to make reservoir release decisions.
9. Results are analyzed using graphical displays. Additional analyses are performed with alternative future-precipitation assumptions and/or operation policies as desired.

SOFTWARE

Key elements of the software system are as follows:

Data Storage System (DSS)

The DSS provides a means for efficient storage and retrieval of hydrologic data. It is used primarily for time series data such as precipitation hyetographs or hydrographs of stage, discharge, storage,

etc. DSS and associated utility programs can be used to (1) store and maintain data for multiple users, (2) store input and output data from applications programs, (3) transfer data between programs and (4) display data in graphs or tables.

Field Data Conversion (CONVRT)

This program provides routine transformations of field data into forms required for hydrologic analysis. Cumulative precipitation is converted to incremental precipitation. Water surface stages and elevations are transformed, as appropriate, into discharges and storages based on rating tables. Reservoir inflows are computed from corresponding outflow and storage hydrographs. Screening for data outside reasonable bounds, estimation of missing data elements, and data smoothing are combined with each of the basic transformations as appropriate to provide an automated flow of usable data.

Areal Precipitation Analysis (PRECIP)

This program is used to calculate subbasin-average precipitation from observed gage data. Subbasin-average rainfall is calculated as the weighted average of rainfall that is estimated at up to five points (nodes) in a subbasin. Rainfall at a node is calculated as the weighted average of rainfall measured at gage sites. One to four gages are used for each node. The gages are selected as the nearest reporting gage in each quadrant with respect to North-South and East-West axes through the node. Weights used in calculating rainfall at a node are inversely proportional to the square of the distance between the node and a gage. The weights used can vary each time interval depending on the number and location of gages reporting that interval. Subbasin hyetographs calculated by PRECIP are stored in a DSS file for subsequent use for runoff forecasting.

Streamflow forecast (HEC1F)

This program is a modified version of computer program HEC1, a primary capability of which is to calculate runoff from complex (multi-subbasin) watersheds using the unit hydrograph approach and hydrologic routing methods. HEC1 is widely used for planning studies and other applications, and runoff parameters for use in the program have been derived for numerous locations throughout the USA. However it is a "single-event" model; there is no capability for maintaining a continuous accounting of soil moisture. Forecast accuracy is therefore likely to be low early in an event, especially for situations where substantial uncertainty is associated with loss rate estimates. However, later in an event

when it becomes possible to calibrate parameters to an observed stream rise, forecast accuracy is improved and should be commensurate with accuracy obtainable with more complex continuous simulation models.

Application of HEC1F to produce short-term runoff forecasts in a multi-subbasin watershed is generally implemented as a two-step process. The first step is to estimate runoff parameters and calculate discharge hydrographs for gaged headwater subbasins. Automatic estimation capabilities are used to derive best fit values for loss rate, unit hydrograph and base flow parameters. Constraints are used to restrict derived values to physically reasonable limits. The parameter estimates for headwater basins provide useful information to aid in establishing loss rate and base flow parameters for remaining (non-headwater) subbasins.

The second application of HEC1F is made to accomplish the following: (1) discharge hydrographs are calculated for all non-headwater subbasins using user-defined runoff parameters, (2) hydrographs are routed and combined throughout the basin and (3) hydrographs are blended at each gage prior to subsequent routing and combining operations. Blending consists of replacing the calculated hydrograph ordinates with observed hydrograph ordinates up to the time of forecast, and providing a smooth transition back to the calculated hydrograph over five future time periods following the time of forecast. Forecasted discharge hydrographs calculated with HEC1F are stored in a DSS file for subsequent use in establishing reservoir release decisions.

Reservoir Operation (HEC-5)

This program is designed to simulate the sequential operation of a system of reservoirs of any configuration. Reservoir releases are determined by the program in accordance with constraints at downstream control points while keeping the system "in balance". A wide variety of factors that affect release decisions can be accommodated, including channel capacities at downstream control points, emergency conditions requiring prereleases, minimum-flow requirements, etc. Reservoir inflow hydrographs and hydrographs of uncontrolled runoff for downstream control points are obtained from preceding HEC1F applications via a DSS file. Output from HEC-5 such as hydrographs of discharge, reservoir stage and storage are written to a DSS file for subsequent display and analysis.

Model Control (MODCON)

This is an interactive, executive program designed to facilitate use of other components of the software system. The program can be used to specify the magnitude of input parameters for PRECIP, HEC1F and HEC-5. For example, values for loss rates, future precipitation or specified future reservoir releases can be easily established with MODCON. MODCON also has the capability to create and send off (for execution) batch jobs that involve the sequential execution of a series of modelling programs, for example - PRECIP, HEC1F (first application), HEC1F (second application) and HEC-5. Summary displays of data status, input-parameter status, job status and program output can be viewed. It is also possible to execute the DSPLAY program to view plots or tabular displays of virtually any variables of interest, including observed data and results of precipitation-runoff and reservoir system simulations.

Graphical Display (DSPLAY)

This is an interactive program that provides a quick and simple means of displaying, in graphical or tabular form, data stored in a DSS file. The graphics capabilities permit the plotting of several curves on one graph, use of a split-screen option for showing plots on each half of a graph, capabilities for shading graphs, over-laying grids, etc.

SCIOTO BASIN APPLICATION

Illustration of application of the software system will be made with reference to the Scioto River Basin, for which the software system is presently operational. Fig. 1 is a map of the basin. There are four Corps of Engineer reservoirs, the primary purpose of which is flood control. However the reservoirs are also operated for water quality and other purposes. Data Collection Platforms at the reservoirs and at precipitation and stream gages throughout the basin transmit data via geostationary satellite to a downlink and computer in Cincinnati, Ohio. Data is "sensed" each hour and transmitted to Cincinnati at 4-hour intervals. The Scioto reservoir system is operated by personnel of the Huntington District Office of the Corps of Engineers, located in Huntington, West Virginia. The observed data is transmitted automatically at fixed intervals from the computer in Cincinnati to a computer in the Huntington District Office, where forecasts and operational decisions are made.

Program MODCON is entered and a Data Status Table (Fig. 2) is obtained. A time of forecast based on data availability is selected and input to MODCON. Input parameters for PRECIP, HEC1F and HEC5 are set. The status of the parameters can be reviewed by calling for a Model Status Table (Fig. 3).

The execution command in MODCON is invoked to create and send off a batch job for processing. The job may involve execution of PRECIP and HEC1F (first application) to provide a set of parameter estimates for headwater subbasins. Or the job may also involve the second application of HEC1F and execution of HEC-5 for making the operational release basins. While a model job is in execution, other tasks can be performed, such as checking the status of the water resource system by viewing plots of observed precipitation and streamflow. Fig. 4 shows a DISPLAY-generated plot of observed discharge hydrographs for four locations on the main stem of the Scioto River. Fig. 5 shows observed precipitation hyetographs for two field gages.

The progress of the modelling job in execution can be monitored and results can be viewed following completion of each component of the job. Fig. 6 shows hydrographs of inflow, outflow and storage for a reservoir. The outflow hydrograph was determined by HEC-5. Fig. 7 shows two forecasted and the observed discharge hydrograph at a downstream control point. One forecast is based on the assumption of no future precipitation whereas the second forecast is based on having 13 mm of rainfall over the basin during a 12-hour period following the time of forecast.

Analysis of information such as that shown in Figs. 6-7 provides a means for interpreting simulation results. Based on such an analysis, the water control manager may decide that there is sufficient information to make operational decisions, or it may be desired to make additional runs to reflect alternative watershed, precipitation or operational conditions.

MAN-MACHINE INTERFACE

An interactive terminal with a keyboard is a common input device for a computer. Some terminals with input graphics capabilities, such as the Tektronix 4014, also permit the use of a graphics tablet as an input device. A "menu" can be created to overlay on the tablet, and capability can be provided to enable an input command, or a series of commands, to be generated simply by touching the appropriate location on the menu.

Fig. 8 illustrates such a menu for the Scioto Basin. MODCON commands can be implemented by touching rectangular command boxes on the left side of the menu. For example, to obtain the table shown in Fig. 1, the box labeled Data Status would be touched. Plots can be generated with the right side of the menu by touching in sequence the location (on the schematic diagram), the desired variable (e.g. reservoir outflow) and PLOT.

The boxes labeled M1 through M11 at the bottom of the menu invoke "macros" for automatic generation of a single or a series of plots of prespecified variables. Fig. 4 and 5 were obtained with such macros.

SUMMARY AND PLANS FOR FUTURE DEVELOPMENT

A comprehensive software system has been developed to aid the water control manager in making operational decisions. The software encompasses components for data conversion and screening, estimation of subbasin-average hyetographs, short-term runoff forecasting and reservoir system simulation. A Data Storage System designed for efficient handling of time series data provides a means for transferring data between analysis components. A graphics program enables interpretation and analysis of observed data and simulation results. An interactive executive program greatly facilitates utilization of the software system.

Experience to date has shown that a major limitation in forecast capability is the estimation of spatial and temporal distribution of rainfall. The use of radar imagery to better define rainfall distribution appears to be a promising development that should be operational in the next year or two. As more experience is acquired in application of the software system, it is likely that substantial enhancements will be made to various components of the system. The modular structure of the system is such that alternative components can readily be substituted or added into the system.

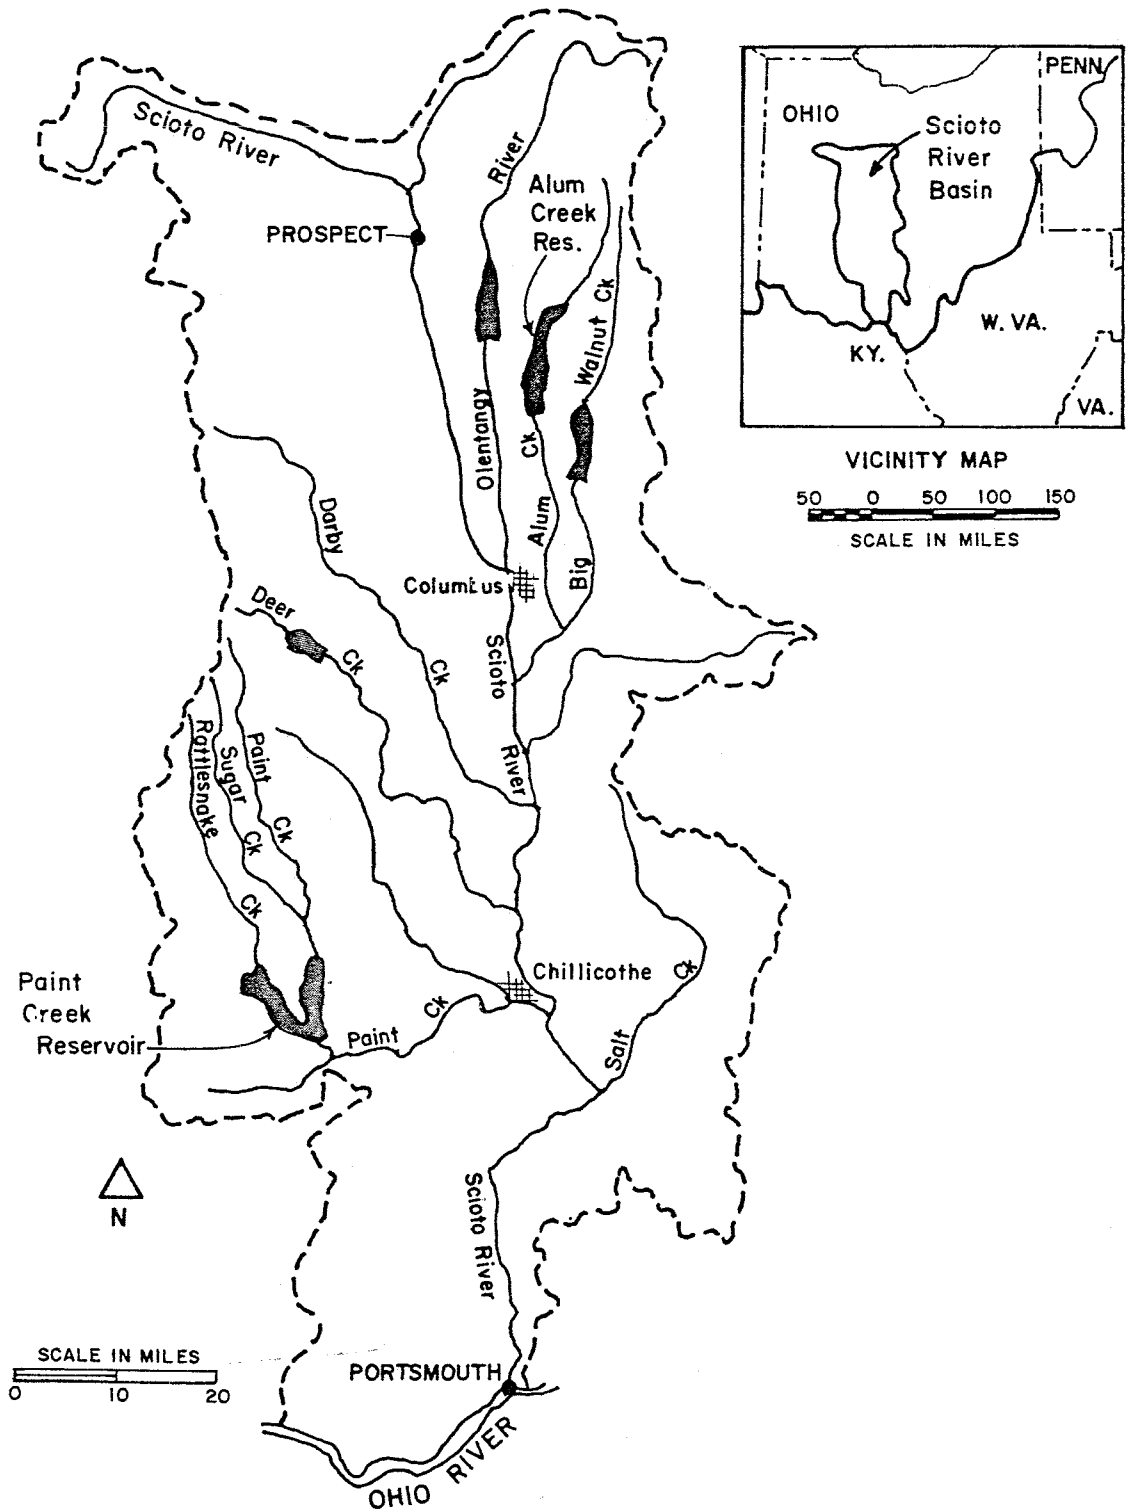


Figure 1. MAP OF SCIOTO RIVER BASIN

DATA STATUS FOR DSSFILE 0000DAT#MASTDB
 SCIOTD 05MAY83 15:40:36
 1 HOUR INTERVALS

LOCATION	PARAMETER	03MAY83				04MAY83				05MAY83			
		HR 20	24	4	8	12	16	20	24	4	8	12	
* * * PRECIPITATION GAGES * * *													
ACSE3	PRECIP-INC	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XX--	
CTSH2	PRECIP-INC	----	----	----	----	-XXX	----	----	----	----	-XXX	----	
DCSOF	PRECIP-INC	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	X----	
DDOD2	PRECIP-INC	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	X----	
GRFH2	PRECIP-INC	----	----	----	----	-XXX	----	----	----	----	-XXX	----	
NBKD3	PRECIP-INC	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XX--	
OCTG1	PRECIP-INC	----	----	----	----	----	----	----	----	----	----	----	
PCSOF	PRECIP-INC	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	X----	
* * * RESERVOIR INFLOW * * *													
ACSE3	FLOW-RES IN	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	X----	
DCSG2	FLOW-RES IN	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	X----	
DDOD2	FLOW-RES IN	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	X----	
PCSI2	FLOW-RES IN	----	----	----	----	----	----	----	----	----	----	----	
* * * RESERVOIR OUTFLOW * * *													
ACD0F	FLOW	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXX-	
DCSOF	FLOW	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXX-	
DDOOF	FLOW	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXX-	
PCSOF	FLOW	----	----	----	----	----	----	----	----	----	----	----	
* * * HEADWATER STREAMFLOW GAGES * * *													
CTSH2	FLOW	----	----	----	----	XXXX	----	----	----	----	XXXX	----	
DYDG2	FLOW	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	X----	
GRFH2	FLOW	----	----	----	----	XXXX	----	----	----	----	XXXX	----	
KLAD3	FLOW	----	----	----	----	----	----	----	----	----	----	----	
HTSF2	FLOW	----	----	----	----	----	----	----	----	----	----	----	
* * * DOWNSTREAM STREAMFLOW GAGES * * *													
BMRI2	FLOW	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	X----	
BRPH2	FLOW	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XX--	
CHSH3	FLOW	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	X----	
CISG3	FLOW	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	X----	
CLAF3	FLOW	XXXX	XXXX	XXX-	----	----	----	----	----	----	----	----	
CLSF4	FLOW	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XX--	
DUSE2	FLOW	----	----	----	----	----	----	----	----	----	----	----	
HIGH3	FLOW	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XX--	
PCSI2	FLOW	----	----	----	----	----	----	----	----	----	----	----	
REWF3	FLOW	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	X----	
WMTH2	FLOW	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	X----	
WDOE2	FLOW	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XX--	

TOTAL NUMBER OF STATIONS = 33

Figure 2 Data Status Table

===== MODEL CONTROL (MODCON) =====

I>STATUS
STATUS

BASIN SCIOTO

FORECAST DAY TIME DATE
 THU 1200 05MAY1983

PPT ALTERNATIVE B

LOSS RATES ZONE STRTL CNSTL
 1 .3 .015
 2
 3

HEC-1F BASE FILES IBASXI IBASAL IXXXAE IXXXAF

HEC-5 BASE FILE IBASAF

OPERATION ALT. A

BATCH JOB OUTPUT OFF

MASTER DATA BASE 0000DAT*MASTIB

===== MODEL CONTROL (MODCON) =====

I>FUTURPPT
FUTURPPT

ZONE	FUTURE PRECIPITATION					
	ALTERNATIVE B		ALTERNATIVE C		ALTERNATIVE D	
	PPT	HR	PPT	HR	PPT	HR
1	1	12	1	24		
2						
3						

Figure 3 Model Status Table

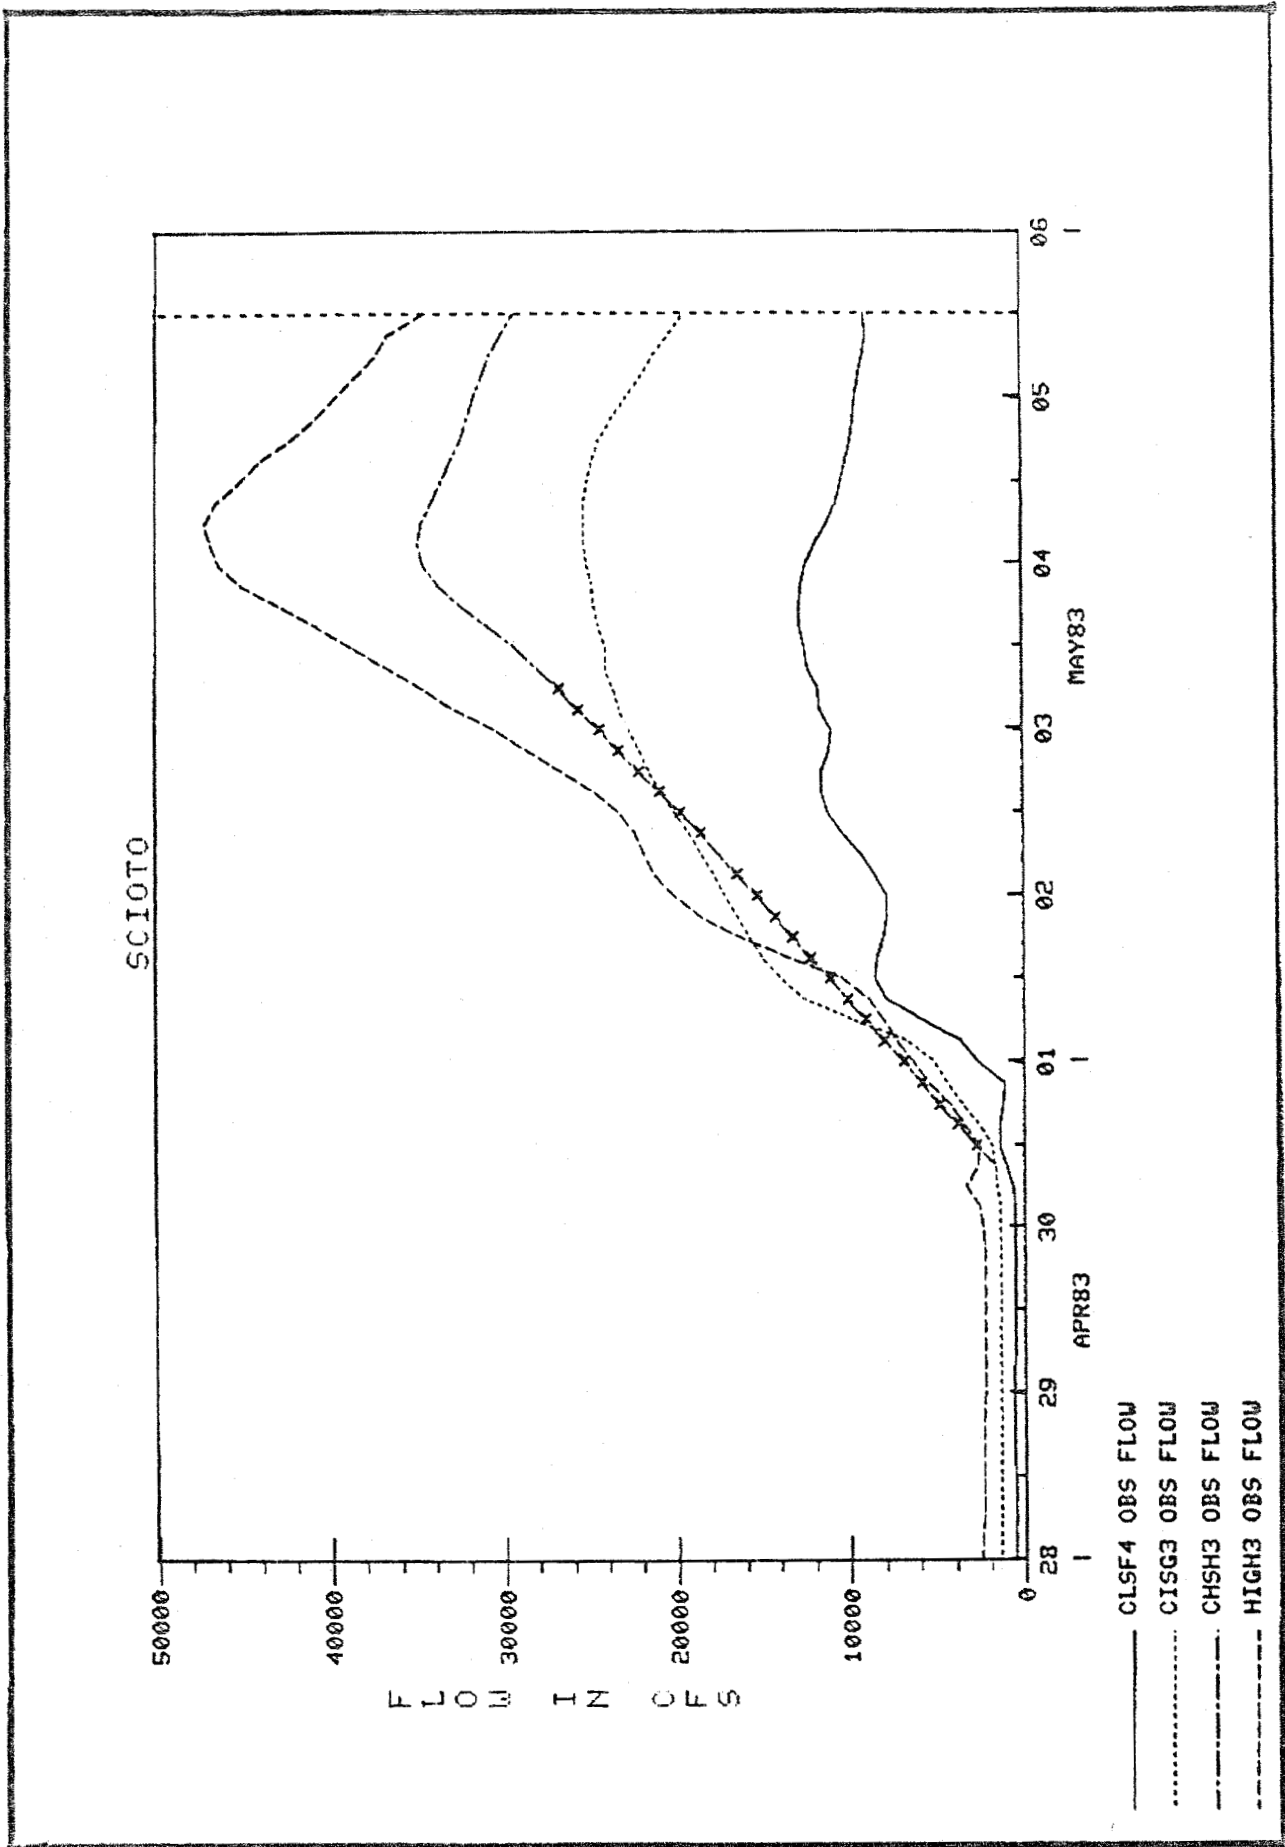


Figure 4 Mainstem Observed Flow Hydrographs

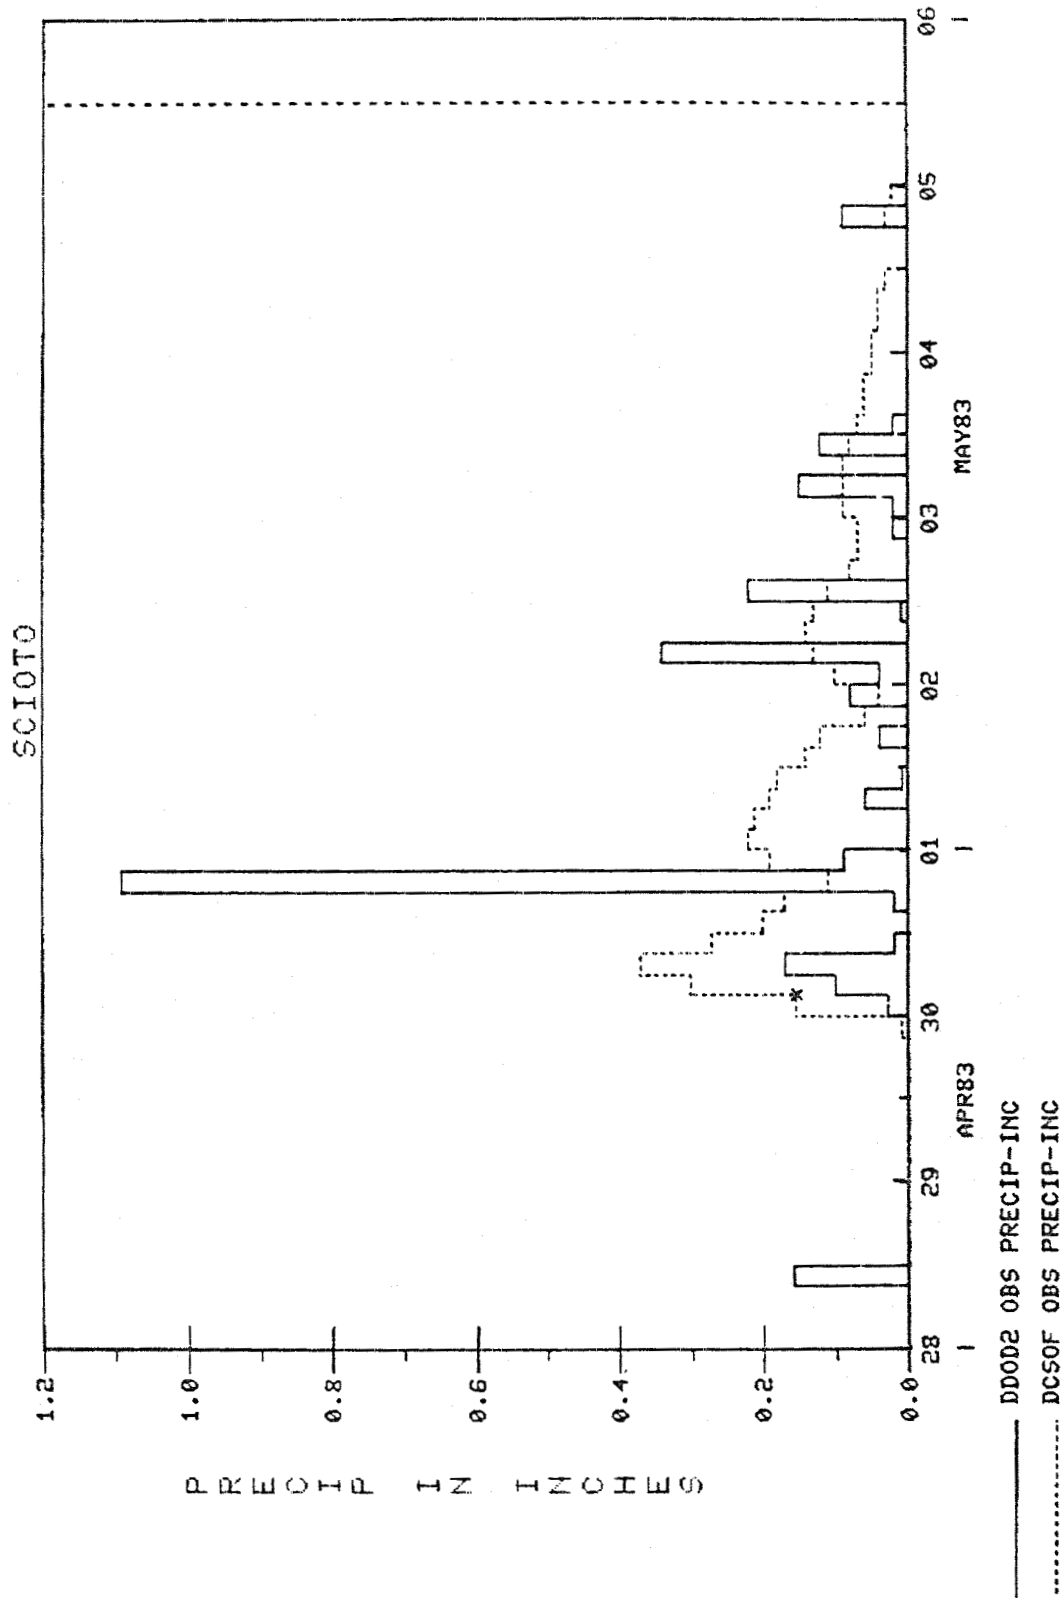


Figure 5 Observed Hyetographs

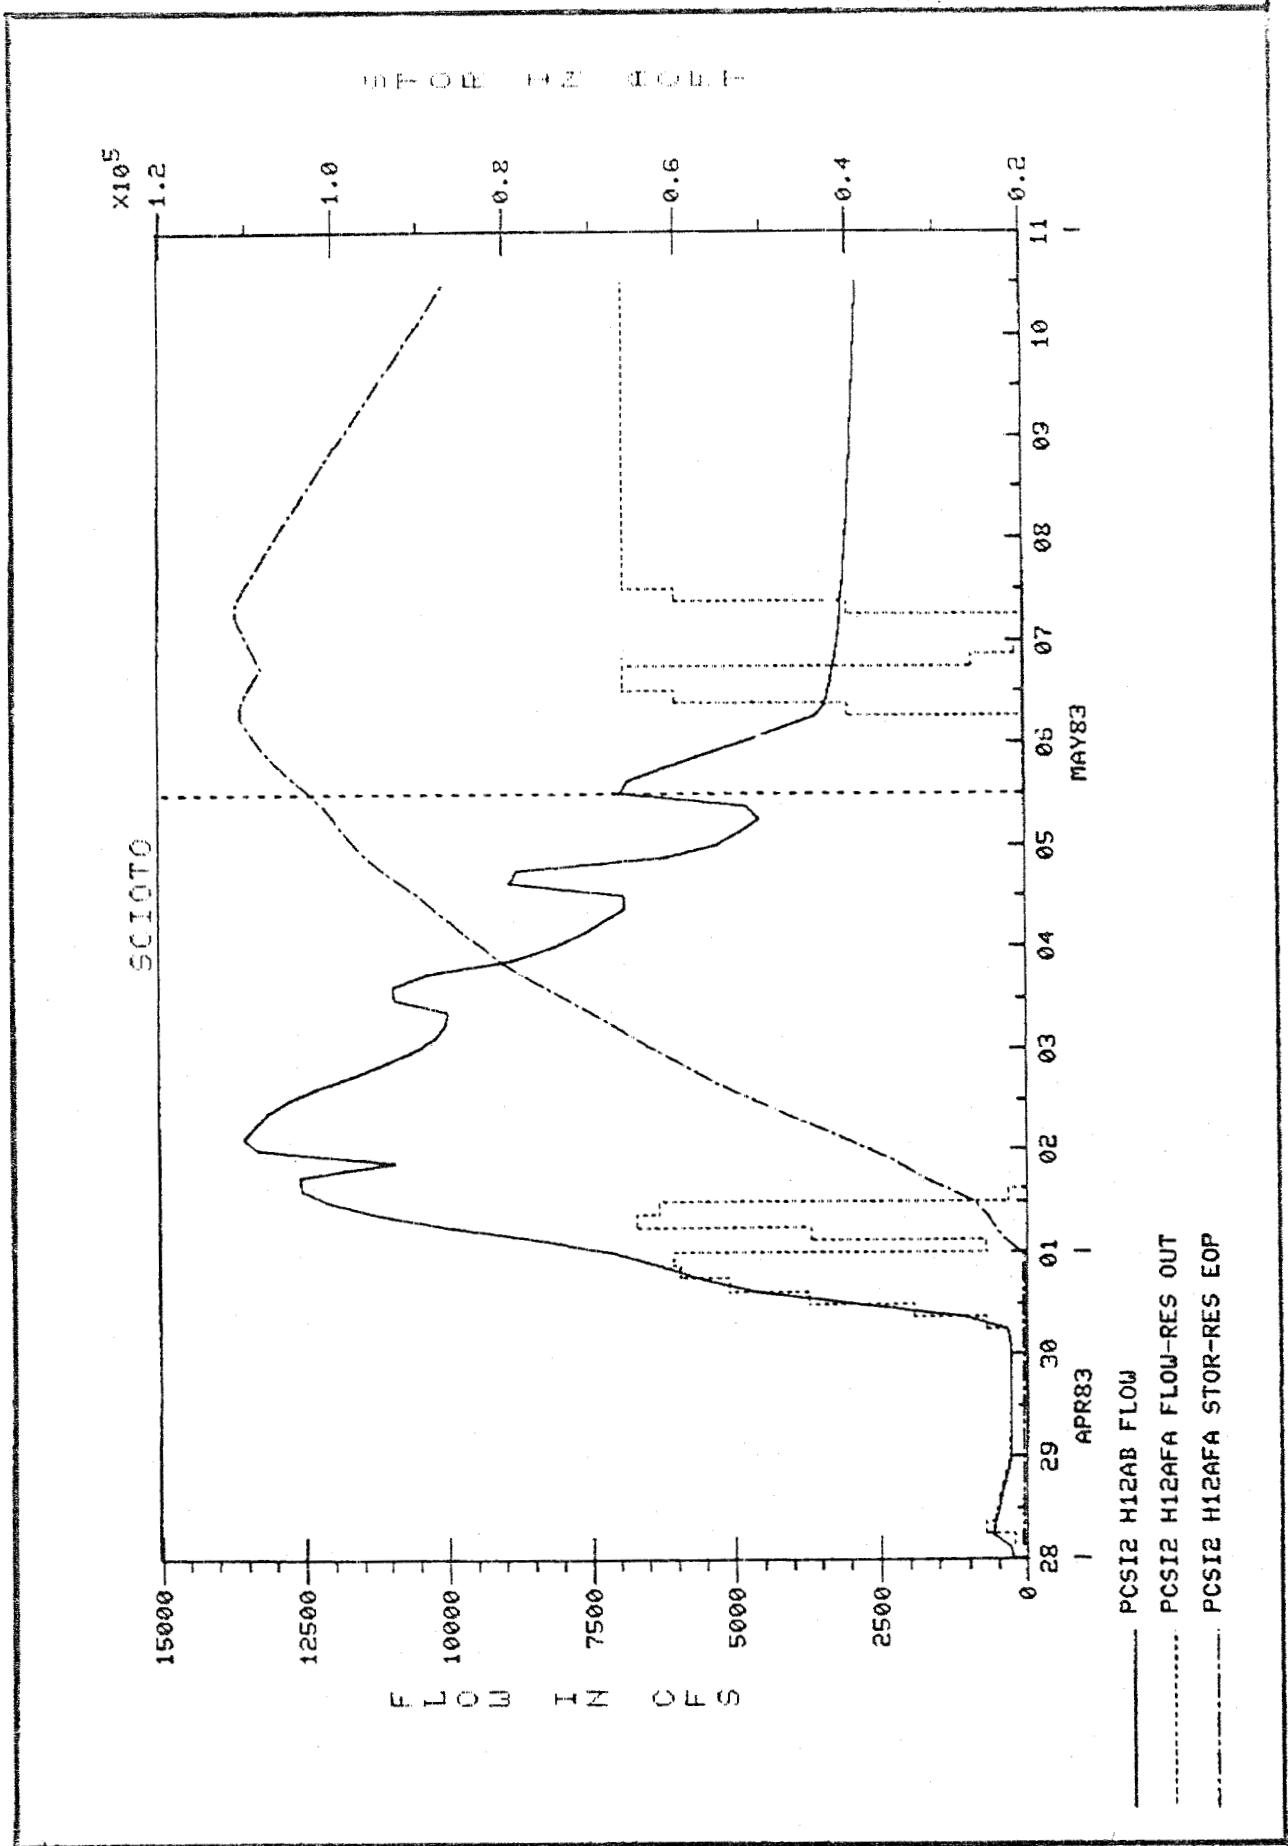


Figure 6 Reservoir Inflow, Outflow and Storage

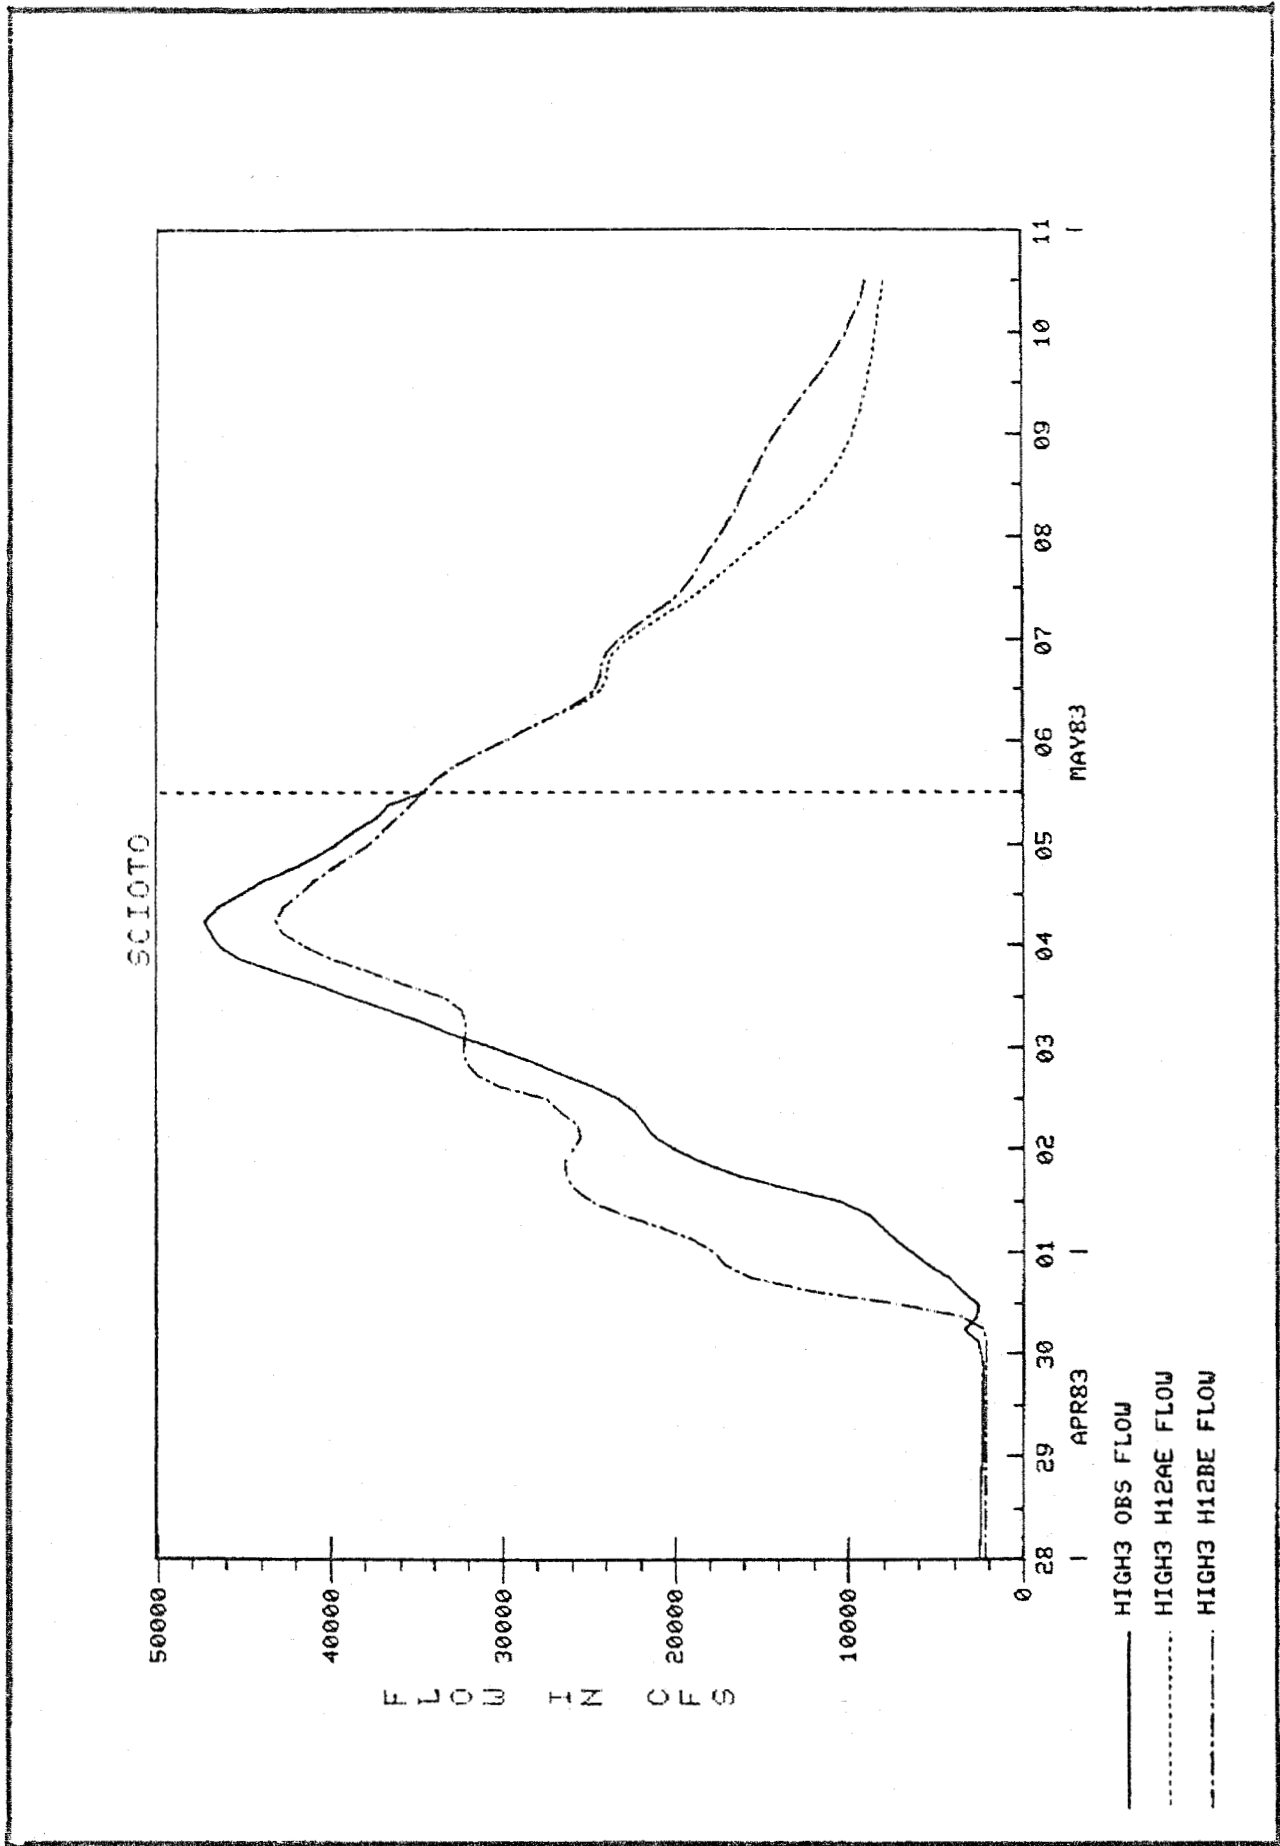


Figure 7 Observed and Forecasted Flow With and Without Additional Precipitation

Technical Paper Series

TP-1	Use of Interrelated Records to Simulate Streamflow	TP-39	A Method for Analyzing Effects of Dam Failures in Design Studies
TP-2	Optimization Techniques for Hydrologic Engineering	TP-40	Storm Drainage and Urban Region Flood Control Planning
TP-3	Methods of Determination of Safe Yield and Compensation Water from Storage Reservoirs	TP-41	HEC-5C, A Simulation Model for System Formulation and Evaluation
TP-4	Functional Evaluation of a Water Resources System	TP-42	Optimal Sizing of Urban Flood Control Systems
TP-5	Streamflow Synthesis for Ungaged Rivers	TP-43	Hydrologic and Economic Simulation of Flood Control Aspects of Water Resources Systems
TP-6	Simulation of Daily Streamflow	TP-44	Sizing Flood Control Reservoir Systems by System Analysis
TP-7	Pilot Study for Storage Requirements for Low Flow Augmentation	TP-45	Techniques for Real-Time Operation of Flood Control Reservoirs in the Merrimack River Basin
TP-8	Worth of Streamflow Data for Project Design - A Pilot Study	TP-46	Spatial Data Analysis of Nonstructural Measures
TP-9	Economic Evaluation of Reservoir System Accomplishments	TP-47	Comprehensive Flood Plain Studies Using Spatial Data Management Techniques
TP-10	Hydrologic Simulation in Water-Yield Analysis	TP-48	Direct Runoff Hydrograph Parameters Versus Urbanization
TP-11	Survey of Programs for Water Surface Profiles	TP-49	Experience of HEC in Disseminating Information on Hydrological Models
TP-12	Hypothetical Flood Computation for a Stream System	TP-50	Effects of Dam Removal: An Approach to Sedimentation
TP-13	Maximum Utilization of Scarce Data in Hydrologic Design	TP-51	Design of Flood Control Improvements by Systems Analysis: A Case Study
TP-14	Techniques for Evaluating Long-Term Reservoir Yields	TP-52	Potential Use of Digital Computer Ground Water Models
TP-15	Hydrostatistics - Principles of Application	TP-53	Development of Generalized Free Surface Flow Models Using Finite Element Techniques
TP-16	A Hydrologic Water Resource System Modeling Techniques	TP-54	Adjustment of Peak Discharge Rates for Urbanization
TP-17	Hydrologic Engineering Techniques for Regional Water Resources Planning	TP-55	The Development and Servicing of Spatial Data Management Techniques in the Corps of Engineers
TP-18	Estimating Monthly Streamflows Within a Region	TP-56	Experiences of the Hydrologic Engineering Center in Maintaining Widely Used Hydrologic and Water Resource Computer Models
TP-19	Suspended Sediment Discharge in Streams	TP-57	Flood Damage Assessments Using Spatial Data Management Techniques
TP-20	Computer Determination of Flow Through Bridges	TP-58	A Model for Evaluating Runoff-Quality in Metropolitan Master Planning
TP-21	An Approach to Reservoir Temperature Analysis	TP-59	Testing of Several Runoff Models on an Urban Watershed
TP-22	A Finite Difference Methods of Analyzing Liquid Flow in Variably Saturated Porous Media	TP-60	Operational Simulation of a Reservoir System with Pumped Storage
TP-23	Uses of Simulation in River Basin Planning	TP-61	Technical Factors in Small Hydropower Planning
TP-24	Hydroelectric Power Analysis in Reservoir Systems	TP-62	Flood Hydrograph and Peak Flow Frequency Analysis
TP-25	Status of Water Resource System Analysis	TP-63	HEC Contribution to Reservoir System Operation
TP-26	System Relationships for Panama Canal Water Supply	TP-64	Determining Peak-Discharge Frequencies in an Urbanizing Watershed: A Case Study
TP-27	System Analysis of the Panama Canal Water Supply	TP-65	Feasibility Analysis in Small Hydropower Planning
TP-28	Digital Simulation of an Existing Water Resources System	TP-66	Reservoir Storage Determination by Computer Simulation of Flood Control and Conservation Systems
TP-29	Computer Application in Continuing Education	TP-67	Hydrologic Land Use Classification Using LANDSAT
TP-30	Drought Severity and Water Supply Dependability	TP-68	Interactive Nonstructural Flood-Control Planning
TP-31	Development of System Operation Rules for an Existing System by Simulation	TP-69	Critical Water Surface by Minimum Specific Energy Using the Parabolic Method
TP-32	Alternative Approaches to Water Resources System Simulation		
TP-33	System Simulation of Integrated Use of Hydroelectric and Thermal Power Generation		
TP-34	Optimizing flood Control Allocation for a Multipurpose Reservoir		
TP-35	Computer Models for Rainfall-Runoff and River Hydraulic Analysis		
TP-36	Evaluation of Drought Effects at Lake Atitlan		
TP-37	Downstream Effects of the Levee Overtopping at Wilkes-Barre, PA, During Tropical Storm Agnes		
TP-38	Water Quality Evaluation of Aquatic Systems		

- TP-70 Corps of Engineers Experience with Automatic Calibration of a Precipitation-Runoff Model
- TP-71 Determination of Land Use from Satellite Imagery for Input to Hydrologic Models
- TP-72 Application of the Finite Element Method to Vertically Stratified Hydrodynamic Flow and Water Quality
- TP-73 Flood Mitigation Planning Using HEC-SAM
- TP-74 Hydrographs by Single Linear Reservoir Model
- TP-75 HEC Activities in Reservoir Analysis
- TP-76 Institutional Support of Water Resource Models
- TP-77 Investigation of Soil Conservation Service Urban Hydrology Techniques
- TP-78 Potential for Increasing the Output of Existing Hydroelectric Plants
- TP-79 Potential Energy and Capacity Gains from Flood Control Storage Reallocation at Existing U.S. Hydropower Reservoirs
- TP-80 Use of Non-Sequential Techniques in the Analysis of Power Potential at Storage Projects
- TP-81 Data Management Systems of Water Resources Planning
- TP-82 The New HEC-1 Flood Hydrograph Package
- TP-83 River and Reservoir Systems Water Quality Modeling Capability
- TP-84 Generalized Real-Time Flood Control System Model
- TP-85 Operation Policy Analysis: Sam Rayburn Reservoir
- TP-86 Training the Practitioner: The Hydrologic Engineering Center Program
- TP-87 Documentation Needs for Water Resources Models
- TP-88 Reservoir System Regulation for Water Quality Control
- TP-89 A Software System to Aid in Making Real-Time Water Control Decisions
- TP-90 Calibration, Verification and Application of a Two-Dimensional Flow Model
- TP-91 HEC Software Development and Support
- TP-92 Hydrologic Engineering Center Planning Models
- TP-93 Flood Routing Through a Flat, Complex Flood Plain Using a One-Dimensional Unsteady Flow Computer Program
- TP-94 Dredged-Material Disposal Management Model
- TP-95 Infiltration and Soil Moisture Redistribution in HEC-1
- TP-96 The Hydrologic Engineering Center Experience in Nonstructural Planning
- TP-97 Prediction of the Effects of a Flood Control Project on a Meandering Stream
- TP-98 Evolution in Computer Programs Causes Evolution in Training Needs: The Hydrologic Engineering Center Experience
- TP-99 Reservoir System Analysis for Water Quality
- TP-100 Probable Maximum Flood Estimation - Eastern United States
- TP-101 Use of Computer Program HEC-5 for Water Supply Analysis
- TP-102 Role of Calibration in the Application of HEC-6
- TP-103 Engineering and Economic Considerations in Formulating
- TP-104 Modeling Water Resources Systems for Water Quality
- TP-105 Use of a Two-Dimensional Flow Model to Quantify Aquatic Habitat
- TP-106 Flood-Runoff Forecasting with HEC-1F
- TP-107 Dredged-Material Disposal System Capacity Expansion
- TP-108 Role of Small Computers in Two-Dimensional Flow Modeling
- TP-109 One-Dimensional Model for Mud Flows
- TP-110 Subdivision Froude Number
- TP-111 HEC-5Q: System Water Quality Modeling
- TP-112 New Developments in HEC Programs for Flood Control
- TP-113 Modeling and Managing Water Resource Systems for Water Quality
- TP-114 Accuracy of Computer Water Surface Profiles - Executive Summary
- TP-115 Application of Spatial-Data Management Techniques in Corps Planning
- TP-116 The HEC's Activities in Watershed Modeling
- TP-117 HEC-1 and HEC-2 Applications on the Microcomputer
- TP-118 Real-Time Snow Simulation Model for the Monongahela River Basin
- TP-119 Multi-Purpose, Multi-Reservoir Simulation on a PC
- TP-120 Technology Transfer of Corps' Hydrologic Models
- TP-121 Development, Calibration and Application of Runoff Forecasting Models for the Allegheny River Basin
- TP-122 The Estimation of Rainfall for Flood Forecasting Using Radar and Rain Gage Data
- TP-123 Developing and Managing a Comprehensive Reservoir Analysis Model
- TP-124 Review of U.S. Army corps of Engineering Involvement With Alluvial Fan Flooding Problems
- TP-125 An Integrated Software Package for Flood Damage Analysis
- TP-126 The Value and Depreciation of Existing Facilities: The Case of Reservoirs
- TP-127 Floodplain-Management Plan Enumeration
- TP-128 Two-Dimensional Floodplain Modeling
- TP-129 Status and New Capabilities of Computer Program HEC-6: "Scour and Deposition in Rivers and Reservoirs"
- TP-130 Estimating Sediment Delivery and Yield on Alluvial Fans
- TP-131 Hydrologic Aspects of Flood Warning - Preparedness Programs
- TP-132 Twenty-five Years of Developing, Distributing, and Supporting Hydrologic Engineering Computer Programs
- TP-133 Predicting Deposition Patterns in Small Basins
- TP-134 Annual Extreme Lake Elevations by Total Probability Theorem
- TP-135 A Muskingum-Cunge Channel Flow Routing Method for Drainage Networks
- TP-136 Prescriptive Reservoir System Analysis Model - Missouri River System Application
- TP-137 A Generalized Simulation Model for Reservoir System Analysis
- TP-138 The HEC NexGen Software Development Project
- TP-139 Issues for Applications Developers
- TP-140 HEC-2 Water Surface Profiles Program
- TP-141 HEC Models for Urban Hydrologic Analysis

- TP-142 Systems Analysis Applications at the Hydrologic Engineering Center
- TP-143 Runoff Prediction Uncertainty for Ungauged Agricultural Watersheds
- TP-144 Review of GIS Applications in Hydrologic Modeling
- TP-145 Application of Rainfall-Runoff Simulation for Flood Forecasting
- TP-146 Application of the HEC Prescriptive Reservoir Model in the Columbia River Systems
- TP-147 HEC River Analysis System (HEC-RAS)
- TP-148 HEC-6: Reservoir Sediment Control Applications
- TP-149 The Hydrologic Modeling System (HEC-HMS): Design and Development Issues
- TP-150 The HEC Hydrologic Modeling System
- TP-151 Bridge Hydraulic Analysis with HEC-RAS
- TP-152 Use of Land Surface Erosion Techniques with Stream Channel Sediment Models
- TP-153 Risk-Based Analysis for Corps Flood Project Studies - A Status Report
- TP-154 Modeling Water-Resource Systems for Water Quality Management
- TP-155 Runoff simulation Using Radar Rainfall Data
- TP-156 Status of HEC Next Generation Software Development
- TP-157 Unsteady Flow Model for Forecasting Missouri and Mississippi Rivers
- TP-158 Corps Water Management System (CWMS)
- TP-159 Some History and Hydrology of the Panama Canal
- TP-160 Application of Risk-Based Analysis to Planning Reservoir and Levee Flood Damage Reduction Systems
- TP-161 Corps Water Management System - Capabilities and Implementation Status

